

StackFlowMaster FPD581, FPD583 and FPD585 Stack gas metering systems

Measurement made easy

Flow metering solutions for
Continuous Emissions
Monitoring (CEMS)



Continuous measurement

- provides continuous, in-stack measurement of volume / mass flowrate and velocity

MCERTS approved

- meets the requirements of EN 14181 and EN 15267-3

Manual and automatic versions

- simple system for basic applications
- optional meter purging and automatic zero / span

Complete CEMS package available

- McMenon can combine with analyzer system to offer a complete CEMS package

Optional purging feature

- for solids contamination levels up to 300 mg/m³

Suitable for wide range of stack sizes and gas temperatures

- for stacks from 1 to 8 m (3.3 to 26.25 ft.) diameter and gas temperatures up to 1200 °C (2192 °F)

StackFlowMaster FPD581, FPD583 and FPD585

Stack gas metering systems

Introduction

The FPD580 series is a range of stack gas flow metering solutions that, when combined with a CEMS analyzer, forms a complete CEMS package for the measurement of mass flowrate of pollutants into the environment. The FPD580 is based on the MAPT multi-port self-averaging pitot flow meter, thousands of which have been installed into a large variety of industries world-wide over many years.

McMenon Averaging Pitot Tubes

The MAPT probe within the FPD580 series produces an averaged differential pressure (DP) signal proportional to the square of the flow rate or velocity. The DP output is fed to a multi-variable transmitter that generates an electrical signal proportional to the flow rate, compensated for pressure and temperature. The outer impact tube has a number of pressure-sensing holes facing upstream that are positioned at equal annular points across the stack diameter, in accordance with a log-linear distribution. The 'total pressures' developed at each upstream hole by the sum of the impact of the flowing medium and the static pressure are first averaged within the outer impact tube and then averaged to a second, more accurate order within the internal averaging tube. This pressure is represented at the head as the high pressure component of the DP output. The low pressure component is generated from a single sensing hole located on the downstream side of the outer impact tube, that measures the static pressure within the stack.

The MAPT is an improvement on the round sensor design due to the unique profiled flats that are positioned around the downstream hole in order to define the point at which the flow lines separate as the stack gasses pass around the outer impact tube. This feature creates a stable pressure area at the downstream pressure sensing hole, maintaining a constant flow coefficient at high velocities enabling a very wide range of flow measurement (turndown).

Each probe is designed to measure across the complete diameter of the stack. For larger diameters the probe is supplied in 2 pieces that are joined on-site using a flanged centre coupling. This approach simplifies transportation, handling and installation.

The probes are supplied in a variety of materials and are designed for attachment to the stack via a range of flanged mountings. The mountings are available from McMenon (if required), or an existing fitting on the stack or a fitting supplied by the customer can be used. Larger stacks typically require a flanged fitting on both sides of the stack (end-supported) for mechanical stability and to prevent probe resonance that reduces product life. McMenon's sizing program checks automatically for resonance issues and warns when they may be present, enabling selection of an end-supported variant to be made. For combinations of high temperature and long insertion lengths, the probe is designed to lock into the end support to reduce the risk of distortion of the probe material.

Interface units

In many applications an interface unit must be installed between the MAPT and the DCS. Two basic (manual) types of interface unit are available that perform one or more of the following functions:

- send outputs to the DCS (to both those required by legislation and those needed by the user)
- enable regulatory tests to be carried out without having to climb the stack
- enable the DCS to send instructions to the system for testing or purging

An automatic interface unit is also available with the following options:

- probe purging (to clear sensing port blockages)
- or**
- automatic zero and span checks (for regulatory compliance)
- or**
- both purging and automatic zero / span check.

The interface unit can be provided with an optional heater to avoid condensation issues when operating in low ambient temperatures.

Product variants

The FPD580 series comprises 3 versions:

FPD581 manual control system

- for the supply of systems that do not require MCERTS or purging or auto zero / span facilities
- for replacement or spare metering probes



Fig. 1: FPD581 sensor to work with remote transmitter (transmitter not shown)

FPD583 manual control system

- a self-contained flow metering system
- supplied with MCERTS interface unit
- for applications where blockage of the probe metering ports is not expected



Fig. 2: Typical stack gas flow probe with StackFlowMaster FPD583 Type A interface unit

StackFlowMaster FPD581, FPD583 and FPD585 Stack gas metering systems

FPD585 automatic control system

- with optional manual / automatic meter purging for particle densities of 30 to 300 mg/m³ (for concentrations above 300 mg/m³, contactMcMenon)
- the purge duration and frequency is programmable to keep the Torbar sensing holes clear of contaminants
- optional automatic system zero / span check
- optional MCERTS (future option)



Fig. 3: FPD585 sensor with purge interface unit

System summary

Model	Description	Interface unit type	Purge (30 to 300 mg/m ³)	Zero / Span check	Transmitter	MCERTS	Temperature element
FPD581	standard system	None	No	No	Optional	No	Optional
FPD583	MCERTS system	MCERTS 'Manual A'	No	No	Yes	Optional	Optional
FPD585	automated metering system	Automatic-B	No	Yes *	Yes	Optional	Optional
		Automatic-C	Yes	Yes *	Yes	(future)	
		Automatic-D	Yes	No	Yes		

* Manual (standard) or Automatic (optional)

Installation and location

Recommended upstream distances

Correct location of the measuring probe in the stack is important in order to optimize performance. Flow that is disturbed by upstream fittings such as valves / dampers, bends and may have an adverse effect on accuracy unless the measuring probe is located at least 8 stack diameters after any such fittings. Minor fittings such as extractive sampling probes (for gas analysis) may be within this distance, providing they are no closer than 3 stack diameters from the probe. If the probe is fitted within distances less than those recommended, the absolute accuracy may be downgraded but repeatability of measurement is still excellent due to the probe's inherent averaging characteristics. Where it is not possible to provide the specified distances and maximum accuracy is required, the use of a flow straightening spool piece enables shorter distances.

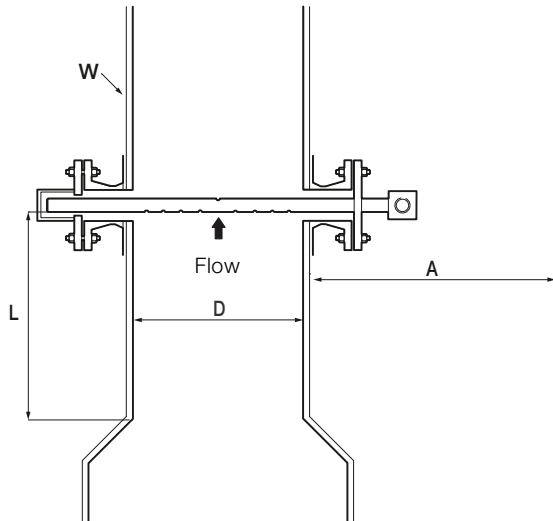


Fig. 4: Installation requirements

Key:

- D = Stack internal diameter (diameter of flow path)
- W = Stack wall thickness (including any refractory lining)
- A = Available access
- Note.** Care should be taken when the stack is surrounded by a wind shield
- L = Upstream straight length

Orientation in stack

The measuring probe must be installed at right angles to the stack and across the stack diameter within the tolerances shown in Fig. 5.

Before installation or removal of a measuring probe it is imperative that careful reference is made to the appropriate installation instructions that are supplied with each shipment. The installation instructions are also available separately on request.

Caution. A vibrating stack can distort the output signal and affect the structural limits of the measuring probe.

Warning. Refer to the instruction manual before installing any FPD580-series.

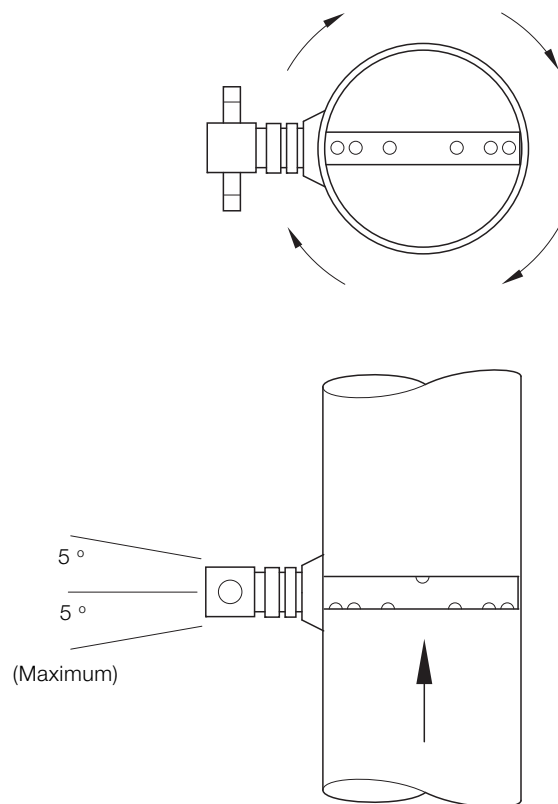


Fig. 5: Orientation

StackFlowMaster FPD581, FPD583 and FPD585

Stack gas metering systems

Specification – probe

Diameter

25 mm (1 in.) or 60 mm (2.36 in.)

Insertion length

1 to 8 meters (3.3 to 26.25 ft.)

Construction

- Single piece
- 2-piece with centre coupling for unsupported lengths ≥5 m (16.4 ft.) (optional)
- Bayonet-style lock within end support for large stacks at high temperatures (optional)

Mounting

- Flanged fittings (single or end-supported) – supplied byMcMenon or customer
- PN10 RF in sizes DN 40, DN 50, DN80, DN 100 and DN 150— ASME 150 lb RF in sizes 1½, 2, 3, 4, 6 in. NB

Temperature measurement

Optional, via integral RTD or remote thermocouple (for stack temperatures >600 °C [1112 °F])

Fluid velocity

Up to 50 m/s (3 to 35 m/s for MCERTS approved systems)

Process fluid

Combustion gases
(details of the gas composition are required by McMenon for sizing)

Process temperature limits

316L and 321H stainless steel probes

550 °C (1022 °F)

700 °C (1292 °F) with bayonet fitting option

UNS N06625 Gr.2 probe

– 900 °C (1652 °F)

– 1200 °C (2192 °F) *

With remote transmitter

As above, depending on probe material

With integral transmitter

180 °C (356 °F)

* possible but with limited probe life

Process pressure limits

Up to pressure rating of mounting flange at operating/design temperature

Construction materials

Probe

- 316L stainless steel
- 321H stainless steel
- UNS N06625 Gr.2

Mountings

- Carbon steel
- A105 carbon steel
- 316L stainless steel
- 321H stainless steel
- UNS N06625 Gr.2

Nuts and bolts

- ASTM A193 B7 / ASTM A194 2H
- ASTM A193 8M / ASTM A194 8MA

Gaskets

- Asbestos-free
- Spiral wound 316 stainless steel (optional)

Specification – transmitter

Type

McMenon multivariable transmitter type 267CS

Measuring range & span limits

Sensor code	Upper range limit (URL)	Lower range limit (LRL)	Minimum span
A	1 kPa 10 mbar 4 in. H ₂ O	0	0.05 kPa 0.5 mbar 0.2 in. H ₂ O
C	6 kPa 60 mbar 24 in. H ₂ O	0	0.2 kPa 2 mbar 0.8 in. H ₂ O

Display

LCD display, plug-in and rotatable with optional back-lighting

Communications

- HART digital communication and 4 to 20 mA
- Modbus RS485

Electrical connections

- 1/2 to 14 NPT
- M20 x 1.5

Electrical certification and hazardous atmospheres (FPD581 & FPD583 only)

Note. All interface units must be installed in safe area

- ATEX Ex ia, ATEX EEx d or ATEX Ex nL (upon application)
- UL (future)
- Factory Mutual (FM) – intrinsically safe (future)
- Factory Mutual (FM) – explosion-proof (future)
- Canadian Standard Association – explosion-proof (future)

Construction materials

Process isolating diaphragms

Hastelloy™ C276

Process flange, adapter, plugs and drain/vent valves

Stainless steel

Sensor fill fluid

Silicone oil

Sensor housing

Stainless steel

Mounting bracket

Stainless steel

Gaskets

PTFE

Nuts and bolts

Stainless steel class A4-70 according to ISO 3506, conforming to NACE MR0175 Class II

Electronics housing and cover

- Aluminum alloy with low copper content
- Baked epoxy finish
- Stainless steel

Cover O-rings

Viton™

StackFlowMaster FPD581, FPD583 and FPD585

Stack gas metering systems

Specification – interface unit

FPD583 MCERTS manual system

Protection

IP65 (NEMA 4) rated. Not suitable for use in hazardous area

Electrical connection

Via 3 x M20 plastic cable glands

Thermostatic internal heater (optional)

Power supply:

- 90 (min.) to 264 V (max.)
- 100 to 240 V AC $\pm 10\%$, 50 / 60 Hz

Housing construction

Epoxy painted steel

FPD585 automatic system

Protection

IP65 (NEMA 4) rated – not suitable for use in hazardous area

Process connections

1/2 in. BSP stainless steel

Supply air connection

1/2 in. BSP stainless steel

Electrical connection

Via 4 x M20 plastic cable glands

Thermostatic internal heater (optional)

Power supply:

- 90 (min.) to 264 V (max.)
- 100 to 240 V AC $\pm 10\%$, 50 / 60 Hz

Ambient temperature

–20 to 50 °C (–4 to 122 °F) – below 0 °C requires heater option

Air supply

Max. 6 barg (87 psig)

Display

89 mm (3.5 in.) color TFT, 1/4 VGA (320 x 240 pixels)

Display backlight

White LED

Operator switches

6 keys accessible without opening the front door

Power supply

- 90 (min.) to 264 V (max.)
- 100 to 240 V AC $\pm 10\%$, 50/60 Hz

Measured components

- Operating pressure
- Operating temperature (optional)
- Differential pressure

Calculated components

- Mass flowrate
- Volumetric flowrate
- Velocity

Digital inputs / outputs

6

Input Functions

- Remote purge activation
- Remote zero check
- Remote span check

Output functions

- Out of service
- Purge in process
- Zero check in process
- Span check in process
- Zero check alarm
- Span check alarm

Analog outputs

Up to 4 with retransmission of pressure, temperature, DP and flow

Type

Programmable, 4 to 20 mA

Housing construction

Epoxy painted steel

Measurement performance

System accuracy

±2 %

Repeatability

≤ 2 % of measuring range

Drift

<0.5 % of measuring range

Data logging parameters

- Temperature
- Operating pressure
- Differential pressure
- Velocity
- Mass flow

Data storage and retrieval

Internal – SD interface

Sampling frequency


1 to 180 seconds, fully-adjustable

StackFlowMaster FPD581, FPD583 and FPD585 Stack gas metering systems

Dimensions


Probe – 25 mm (1.0 in.) diameter with weldcup end support (for remote transmitter)

Dimensions in mm (in.)

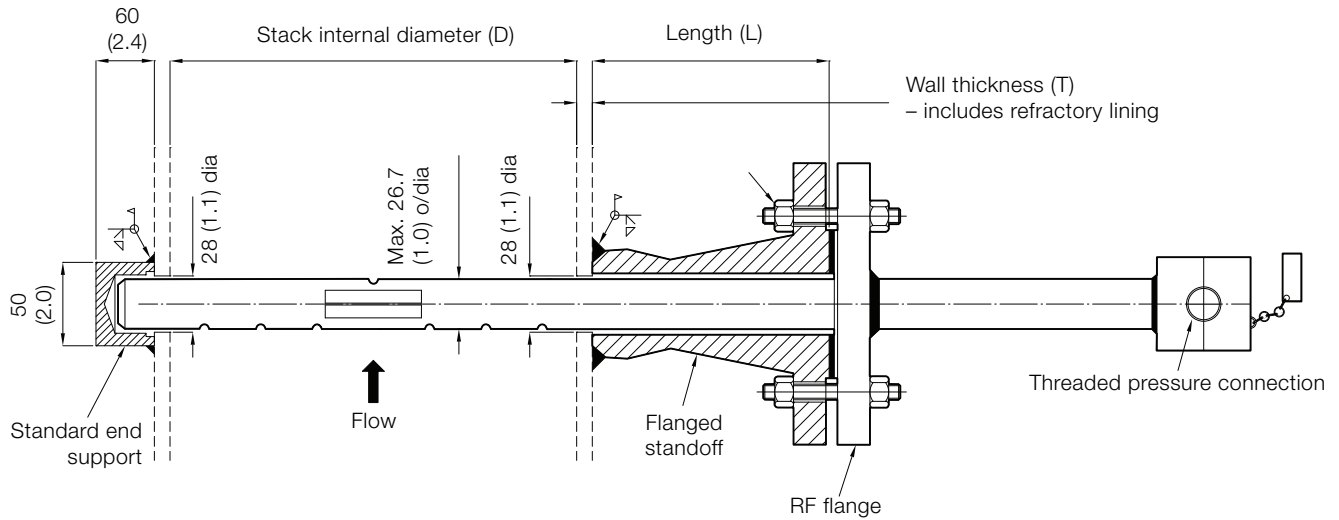


Probe – 25 mm (1.0 in.) diameter with weldcup end support (with integral transmitter)

Dimensions in mm (in.)

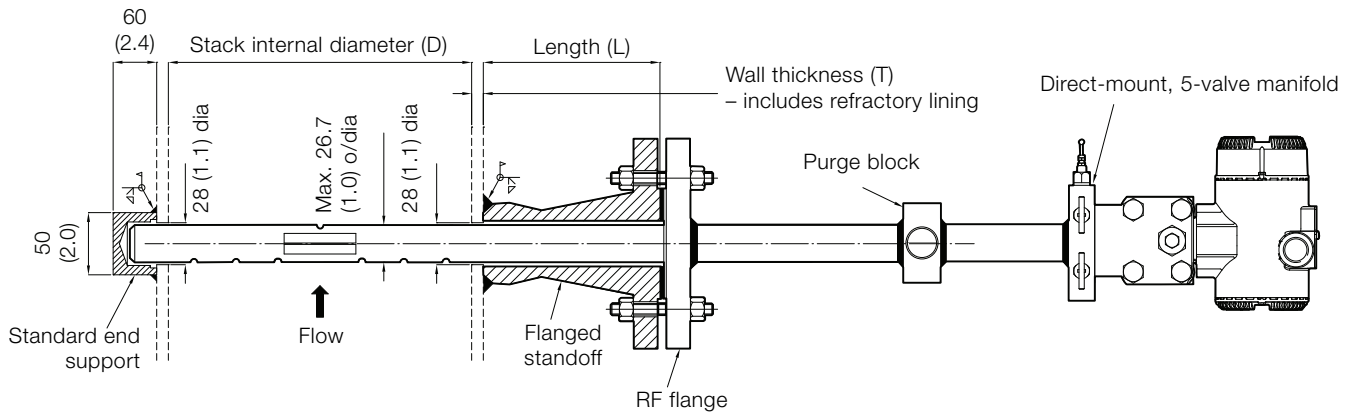


Probe – 25 mm (1.0 in.) diameter with flanged end support (with integral transmitter)

Dimensions in mm (in.)

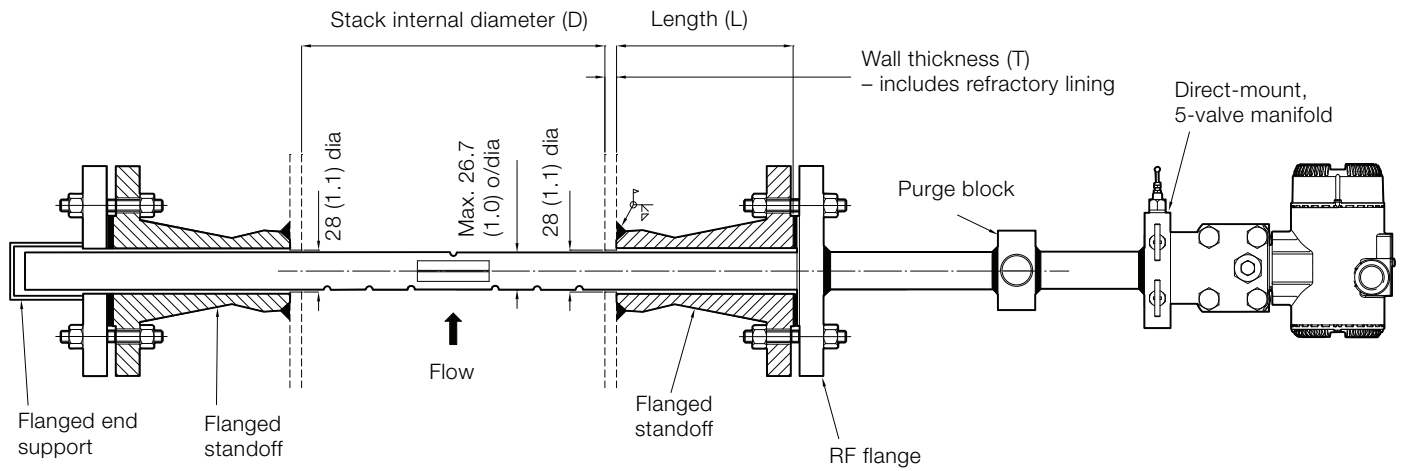

Probe – 60 mm (2.4 in.) diameter with weldcup end support (for remote transmitter)


Dimensions in mm (in.)

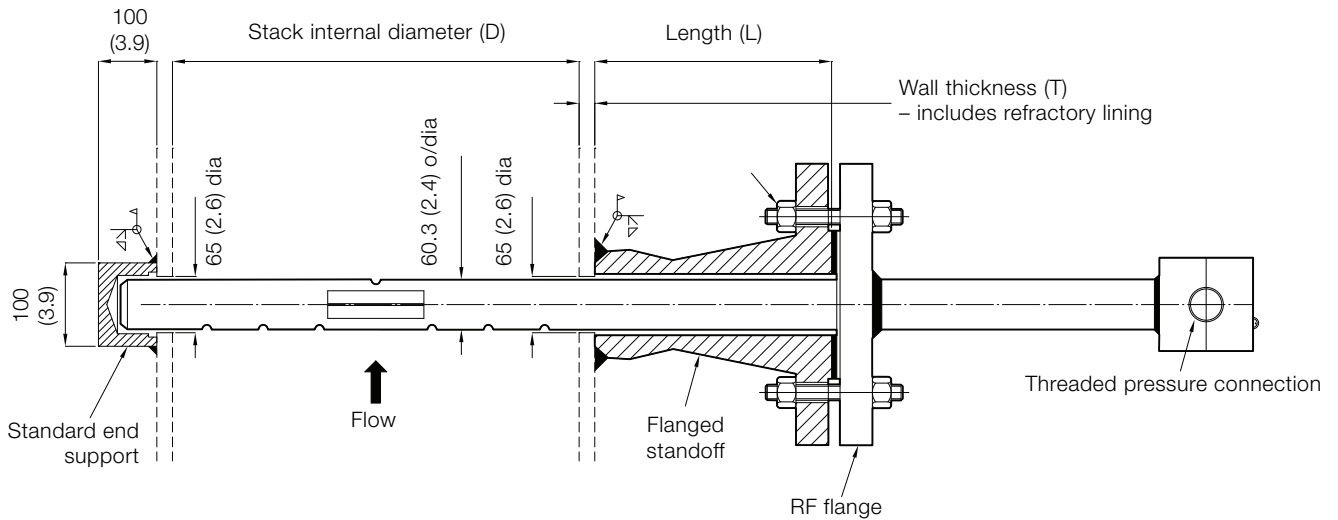

StackFlowMaster FPD581, FPD583 and FPD585 Stack gas metering systems


Probe – 60 mm (2.4 in.) diameter with flanged end support (for integral transmitter)

Dimensions in mm (in.)

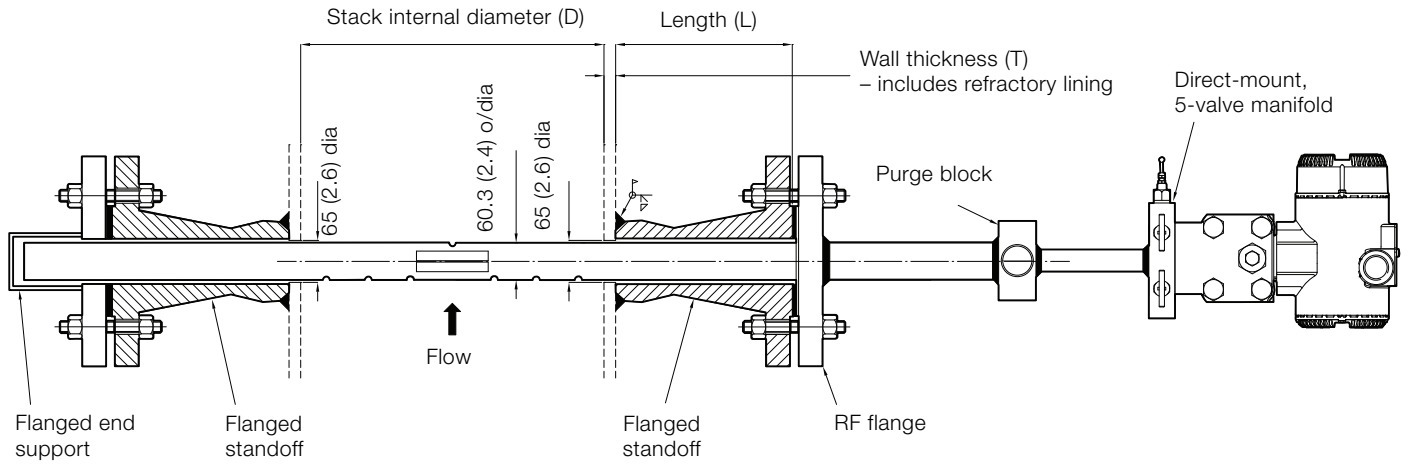


Probe – 60 mm (2.4 in.) diameter with weldcup end support (with integral transmitter)

Dimensions in mm (in.)

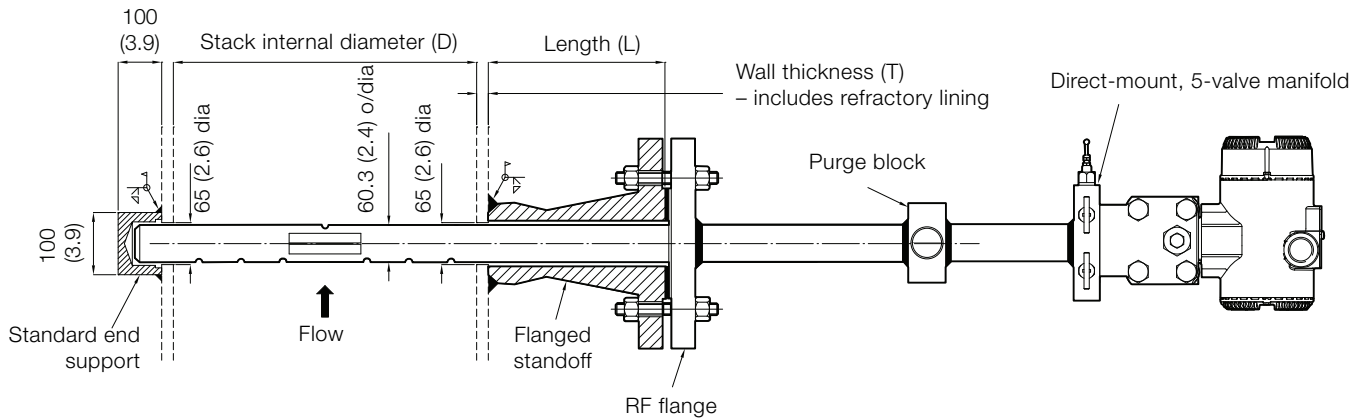


FPD583 manual interface unit

Dimensions in mm (in.)

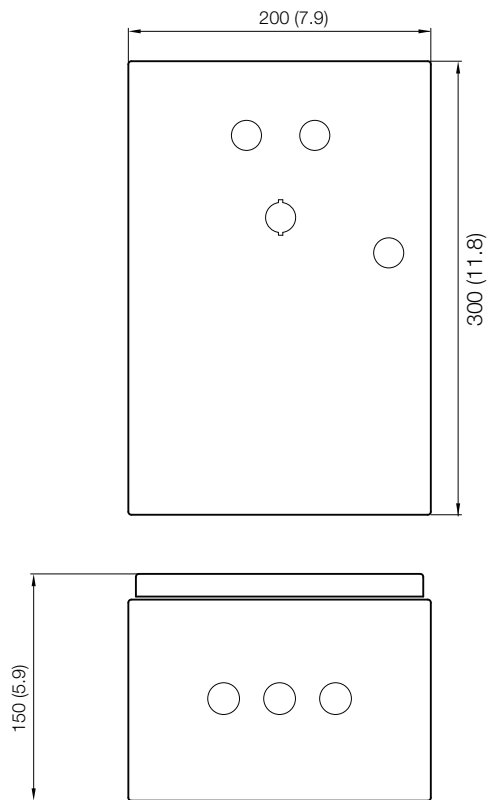

FPD585 automatic interface unit

Dimensions in mm (in.)

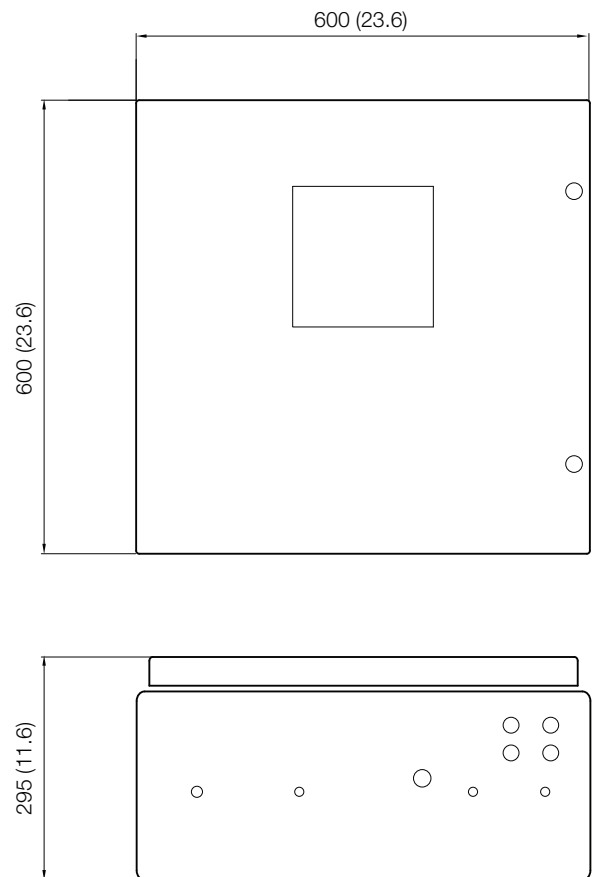

StackFlowMaster FPD581, FPD583 and FPD585 Stack gas metering systems

Ordering information

StackFlowMaster FPD581 – probe only

StackFlowMaster probe	FPD581	Standard codes												
		XX	XX	XX	XX	XXX	XXX	X	X	X	X	XX	X	X
Design level														
Not applicable	Y0													
1 – mass flow (267CS)	M1													
Probe type														
25 mm OD flanged probe without end support	F3													
25 mm OD flanged probe with cup end support	F4													
25 mm OD flanged probe with flanged external end support	F5													
60 mm OD flanged probe without end support	G3													
60 mm OD flanged probe with flanged external end support	G5													
Probe material														
316L stainless steel	S6													
321H stainless steel	S1													
UNS N06625 Gr.2	N2													
Other	Z9													
Stack fitting material														
Not required	YO													
Carbon steel	C3													
316L stainless steel	S6													
321H stainless steel	S1													
UNS N06625 Gr.2	N2													
Other	Z9													
Process connection size														
DN 40 (1½ in.)	040													
DN 50 (2 in.)	050													
DN 80 (3 in.)	080													
DN 100 (4 in.)	100													
DN 150 (6 in.)	150													
Other	999													
Process connection rating														
ASME 150 lb RF	A1F													
PN 10 / PN 16 RF	D1F													
Other	Z9Z													
Standoff														
Not required	0													
Flange standoff	1													
2 x flange standoff + flanged end support	2													
Flanged end support only	3													

Optional codes					
XX	XX	XXX	XX	XX	XX

See page 16

Continued on page 15

Standard codes

Optional codes

StackFlowMaster probe	FPD581	XX	XX	XX	XX	XXX	XXX	X	X	X	X	X	XX	X	X	
		See page 14														
Interface unit options																
No interface unit																Y
DP transmitter mounting position																
1/4 in. NPT needle valves (remote transmitter mounting only)																1
1/2 in. NPT needle valves (remote transmitter mounting only)																2
Integral 5-valve manifold (direct mount transmitter only)																5
Other																9
DP span limits																
Not applicable																Y
1 kPa / 10 mbar / 4 in. H ₂ O																A
6 kPa / 60 mbar / 24 in. H ₂ O																C
Seal material																
Not applicable																0
PTFE																4
Communications output																
Not applicable																Y0
HART digital communication and 4 to 20 mA																H1
Modbus 485																M1
DP transmitter housing																
Not applicable																Y
Aluminium alloy / 1/2 – 14 NPT																A
Aluminium alloy / M20 x 1.5																B
AISI 316L stainless steel / 1/2 – 14 NPT																S
AISI 316L stainless steel / M20 x 1.5																T
Integrated LCD display																
Not applicable																0
LCD display (backlit)																2

XX	XX	XXX	XX	XX	XX
----	----	-----	----	----	----

See page 16

StackFlowMaster FPD581, FPD583 and FPD585

Stack gas metering systems

StackFlowMaster probe	Standard codes													Optional codes						
	FPD581	XX	XX	XX	XX	XXX	XXX	X	X	X	X	X	XX	X	X	XX	XX	XXX	XX	XX
See pages 14 and 15																				
Temperature element																				
Integral to probe (RTD)														AT						
Integral to probe (thermocouple – no temperature compensation)														AV						
Bolts and gaskets																				
Asbestos free gasket, B7 / 2H stud bolts														K1						
Asbestos free gasket, 8M / 8MA stud bolts														K2						
Spiral wound gasket, B7 / 2H stud bolts														K3						
Spiral wound gasket, 8M / 8MA stud bolts														K4						
Probe design																				
2-piece construction														TP2						
Bayonet fitting														TP3						
DP transmitter explosion certificates																				
Factory mutual (FM) – intrinsically safe														EA						
Factory mutual (FM) – explosion-proof														EB						
Canadian Standard Association (CSA) – explosion-proof														EE						
Certificates																				
Material monitoring with inspection certificate 3.1 acc. EN 10204														C2						
Material monitoring NACE MR 01-75 with inspection certificate 3.1 acc. EN 10204														CN						
Dye penetrant NDE of welds														C9						
Hydrostatic pressure test certificate														CB						
Documentation language* (supplied in English as standard)																				
German														M1						
Italian														M2						
Spanish														M3						
French														M4						
Chinese														M6						

*Commissioning instructions are supplied with each transmitter.

Comprehensive operating instructions are available as a free download from www.mcmenon.com or printed copies can be ordered as additional items.

StackFlowMaster FPD583 – manual system

StackFlowMaster system (manual)	FPD583	Standard codes										Optional codes										
		XX	XX	XX	XX	XXX	XXX	X	X	X	X	X	XX	X	X	XX	XX	XXX	XXX	XX	XX	XX
Design level																						
Not applicable		Y0																				
1 – mass flow (267CS)		M1																				
Probe type																						
Interface unit only		Y0																				
25 mm OD flanged probe without end support		F3																				
25 mm OD flanged probe with cup end support		F4																				
25 mm OD flanged probe with flanged external end support		F5																				
60 mm OD flanged probe without end support		G3																				
60 mm OD flanged probe with flanged external end support		G5																				
Probe material																						
Interface unit only		Y0																				
316L stainless steel		S6																				
321H stainless steel		S1																				
UNS N06625 Gr.2		N2																				
Other		Z9																				
Stack fitting material																						
Not required		Y0																				
Carbon steel		C3																				
316L stainless steel		S6																				
321H stainless steel		S1																				
UNS N06625 Gr.2		N2																				
Other		Z9																				
Process connection size																						
Not required (interface unit only)						000																
DN 40 (1½ in.)						040																
DN 50 (2 in.)						050																
DN 80 (3 in.)						080																
DN 100 (4 in.)						100																
DN 150 (6 in.)						150																
Other						999																
Process connection rating																						
Interface unit only																						
ASME 150 lb RF																						
PN 10 / PN 16 RF																						
Other																						

See page 16

Continued on page 18

StackFlowMaster FPD581, FPD583 and FPD585 Stack gas metering systems

		Standard codes													
StackFlowMaster system (manual)	FPD583	XX	XX	XX	XX	XXX	XXX	X	X	X	X	X	XX	X	X
		See page 17													
Standoff															
Not required		0													
Flange standoff		1													
2 x flange standoff + flanged end support		2													
Flanged end support only		3													
Interface unit options															
Status module interface unit – safe area only		A													
DP transmitter mounting position															
Interface unit only		0													
1/4 in. NPT needle valves (remote transmitter mounting only)		1													
1/2 in. NPT needle valves (remote transmitter mounting only)		2													
Integral 5-valve manifold (direct mount transmitter only)		5													
Other		9													
DP span limits															
Not applicable		Y													
1 kPa / 10 mbar / 4 in. H ₂ O		A													
6 kPa / 60 mbar / 24 in. H ₂ O		C													
Seal material															
Not applicable		0													
PTFE		4													
Communications output															
Not applicable		Y0													
HART digital communication and 4 to 20 mA		H1													
Modbus 485		M1													
DP transmitter housing															
Not applicable		Y													
Aluminium alloy / 1/2 – 14 NPT		A													
Aluminium alloy / M20 x 1.5		B													
AISI 316L stainless steel / 1/2 – 14 NPT		S													
AISI 316L stainless steel / M20 x 1.5		T													
Integrated LCD display															
Not applicable		0													
LCD display (backlit)		2													

Optional codes						
XX	XX	XXX	XXX	XX	XX	XX
See page 19						

StackFlowMaster system (manual)	FPD583	Standard codes												Optional codes													
		XX	XX	XX	XX	XXX	XXX	X	X	X	X	X	XX	X	X	XX	XX	XXX	XXX	XX	XX	XX					
		See pages 17 and 18																									
Temperature element																											
Integral to probe (RTD)														AT													
Integral to probe (thermocouple – no temperature compensation)														AV													
Bolts and gaskets																											
Asbestos free gasket, B7 / 2H stud bolts														K1													
Asbestos free gasket, 8M / 8MA stud bolts														K2													
Spiral wound gasket, B7 / 2H stud bolts														K3													
Spiral wound gasket, 8M / 8MA stud bolts														K4													
Probe design																											
2-piece construction															TP2												
Bayonet fitting															TP3												
Heater interface unit																											
Heater – 230 V AC																HC2											
Heater – 110 V AC																HC3											
DP transmitter explosion certificates																											
Factory mutual (FM) – intrinsically safe																	EA										
Factory mutual (FM) – explosion-proof																	EB										
Canadian Standard Association (CSA) – explosion-proof																	EE										
Certificates																											
Material monitoring with inspection certificate 3.1 acc. EN 10204																		C2									
Material monitoring NACE MR 01-75 with inspection certificate 3.1 acc. EN 10204																		CN									
Dye penetrant NDE weld inspection																		C9									
Hydrostatic pressure test certificate																		CB									
MCerts																		CV									
EN 14181 / EN 15267-3 (TÜV Report)																		CU									
Documentation language* (supplied in English as standard)																											
German																			M1								
Italian																			M2								
Spanish																			M3								
French																			M4								
Chinese																			M6								

*Commissioning instructions are supplied with each transmitter.

Comprehensive operating instructions are available as a free download from www.mcmenon.com or printed copies can be ordered as additional items.

StackFlowMaster FPD581, FPD583 and FPD585

Stack gas metering systems

StackFlowMaster FPD585 – automatic system

		Standard codes												Optional codes												
StackFlowMaster system (automatic)		FPD585	XX	XX	XX	XX	XXX	XXX	X	X	X	X	XX	X	X	XX	XX	XX	XX	XXX	XXX	XXX	XX	XX	XX	
Design level																										
1 – mass flow (267CS)		M1																								
Probe type																										
Interface unit only		Y0																								
25 mm OD flanged probe without end support		F3																								
25 mm OD flanged probe with cup end support		F4																								
25 mm OD flanged probe with flanged external end support		F5																								
60 mm OD flanged probe without end support		G3																								
60 mm OD flanged probe with flanged external end support		G5																								
Probe material																										
Interface unit only		Y0																								
316L stainless steel		S6																								
321H stainless steel		S1																								
UNS N06625 Gr.2		N2																								
Other		Z9																								
Stack fitting material																										
Not required		Y0																								
Carbon steel		C3																								
316L stainless steel		S6																								
321H stainless steel		S1																								
UNS N06625 Gr.2		N2																								
Other		Z9																								
Process connection size																										
Not required (interface unit only)							000																			
DN 40 (1½ in.)							040																			
DN 50 (2 in.)							050																			
DN 80 (3 in.)							080																			
DN 100 (4 in.)							100																			
DN 150 (6 in.)							150																			
Other							999																			
Process connection rating																										
Interface unit only								Y0Y																		
ASME 150 lb RF								A1F																		
PN 10 / PN 16 RF								D1F																		
Other								Z9Z																		

See page 22

Continued on page 21

		Standard codes														
StackFlowMaster system (automatic)		FPD585	XX	XX	XX	XX	XXX	XXX	X	X	X	X	XX	X	X	
		See page 20														
Standoff																
Not required								0								
Flange standoff								1								
2 x flange standoff + flanged end support								2								
Flanged end support only								3								
Interface unit options																
Control interface unit with zero and span check – safe area only															B	
Control interface unit with zero and span check and purge – safe area only															C	
Control interface unit with purge – safe area only															D	
DP transmitter mounting position																
Interface unit only								0								
1/4 in. NPT needle valves (remote transmitter mounting only)								1								
1/2 in. NPT needle valves (remote transmitter mounting only)								2								
Other								9								
DP span limits																
1 kPa / 10 mbar / 4 in. H ₂ O															A	
6 kPa / 60 mbar / 24 in. H ₂ O															C	
Seal material																
PTFE																4
Communications output																
4...20 mA output																M5
Modbus 485																M6
DP transmitter housing																
Aluminium alloy / M20 x 1.5																B
Integrated LCD display																
LCD display																1
LCD display (backlit)																2

Optional codes							
XX	XX	XXX	XXX	XXX	XX	XX	XX
See page 22							

StackFlowMaster FPD581, FPD583 and FPD585

Stack gas metering systems

StackFlowMaster system (automatic)	Standard codes												Optional codes											
	FPD585	XX	XX	XX	XX	XXX	XXX	X	X	X	X	XX	X	XX	XX	XX	XX	XX						
	See pages 20 and 21																							
Temperature element																								
Integral to probe (RTD)																		AT						
Integral to probe (thermocouple – no temperature compensation)																		AV						
Bolts and gaskets																								
Asbestos free gasket, B7 / 2H stud bolts																		K1						
Asbestos free gasket, 8M / 8MA stud bolts																		K2						
Spiral wound gasket, B7 / 2H stud bolts																		K3						
Spiral wound gasket, 8M / 8MA stud bolts																		K4						
Probe design																								
2-piece construction																		TP2						
Bayonet fitting																		TP3						
Heater interface unit																								
Heater – 230 V AC																		HC2						
Heater – 110 V AC																		HC3						
Span check regulator																								
Span check regulator																		PC1						
DP transmitter explosion certificates																								
Factory mutual (FM) – intrinsically safe																		EA						
Factory mutual (FM) – explosion-proof																		EB						
Canadian Standard Association (CSA) – explosion-proof																		EE						
Certificates																								
Material monitoring with inspection certificate 3.1 acc. EN 10204																		C2						
Material monitoring NACE MR 01-75 with inspection certificate 3.1 acc. EN 10204																		CN						
Dye penetrant NDE weld inspection																		C9						
Hydrostatic pressure test certificate																		CB						
MCerts (future option)																		CV						
EN 14181 / EN 15267-3 (TÜV Report) (future option)																		CU						
Documentation language* (supplied in English as standard)																								
German																		M1						
Italian																		M2						
Spanish																		M3						
French																		M4						
Chinese																		M6						

*Commissioning instructions are supplied with each transmitter.

Comprehensive operating instructions are available as a free download from www.McMenon.com or printed copies can be ordered as additional items.

Notes

Contact us

McMenon Engineering
Services

Salterbeck Trading Estate
Workington, Cumbria
CA14 5DS
UK

Tel: +44 (0)1946 830 611

Fax: +44 (0)1946 832 661

www.mcmemon.com

Note

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. McMenon does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of McMenon.

Copyright© 2014 McMenon
All rights reserved

3KXF511580R1001